

TGB1N- 40



1


TGB1N- 40
40A

50/60Hz

230V

2

TG B 1N - 40 1P+N C 16



A
C/D
(1P+N N)
A 40

3

3.1

1

1

		TGB1N- 40	
		GB/T10963.1 IEC60898-1	
		CCC CE TUV	
		1P+N N)	
Hz		50/60	
A	I _{nm}	40	
A	I _e	6 10 16 20 25 32 40	
V	U _e	AC230	
V	U _i	500	
kV	U _{imp}	4	
kA	I _{cs}	4.5	
kA	I _{cn}	4.5	
		C(5In 10In D(10In 14In)	
		2	
		-	
		10000	
		20000	
		IP20	
		-35 +70	
		2000m	
(mm ²)		10	
(N _h)		1.5	
		II III	
		THB5- 7.5	

TGB1N- 40

3.2


2

2

	A				
a	1. 13 n		t 1h		
	1. 45 n	1. 13 n	t 1h		5s
	2. 55 n		Is t 60s In 32A		
b	5 n		t 0.1s		
	10 n		t 0.1s		
c	10 n		t 0.1s		
	14 n		t 0.1s		

30

3.3

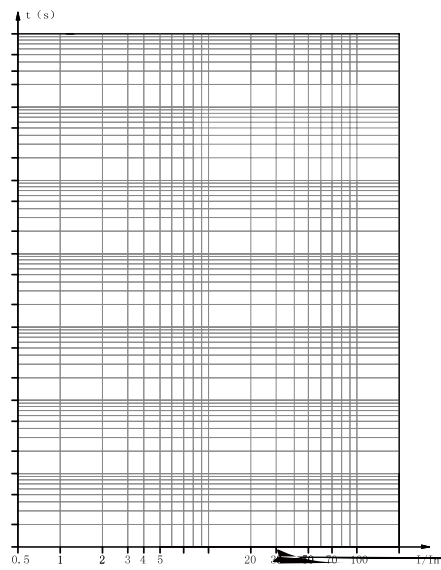

C

D

3.4

10mm²

3


1.5N·m

3

A	mm ²
6	1
10	1.5
16 20	2.5
25	4
32	6
40	10

TGB1N- 40

4

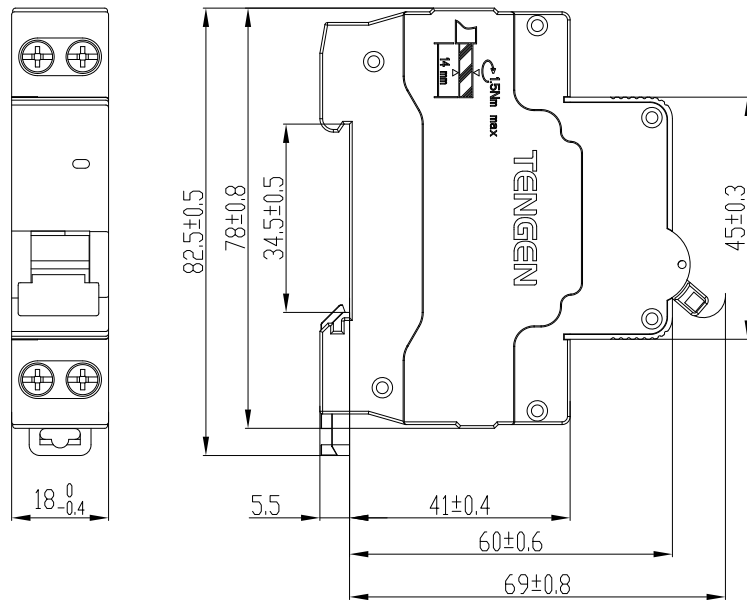

5

5.1				
5.2	TGB1N- 40	C	32A	1000
	TGB1N- 40 1P+N C32 1000			